



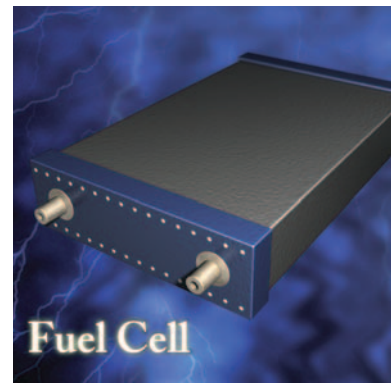

## PC-Based Data Acquisition Unit

# MX100

A PC-based data acquisition system for the future, delivering unparalleled performance. When combined with Yokogawa's proprietary PC software, the MX100's high speed, multi channel capability, and high withstand voltage offers the ultimate in measurement power.

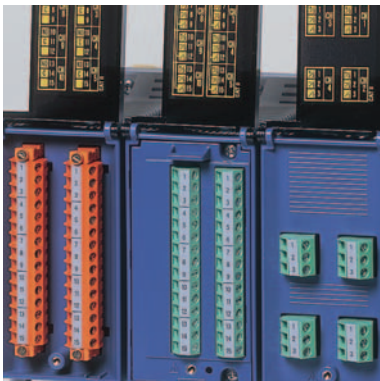

# MX100

## PC-Based Data Acquisition Unit

A PC-based data acquisition system for the future,  
delivering unparalleled performance.

When combined with Yokogawa's proprietary PC software,  
the MX100's high speed, multi channel capability,  
and high withstand voltage offers  
the ultimate in measurement power.



## DAQMASTER™

### Maximum Performance.....

#### ■ High-Speed, Multi-Channel Capability, High withstand Voltage

- Shortest measurement interval of 10 ms (high-speed measurement of 10 ms on 24 channels or 100 ms on 60 channels is possible).
- Possible to acquire data from up to 1,200 channels (when using Yokogawa's proprietary software).
- Reinforced insulation between the input terminal and the case handles 3700 Vrms for one minute, or 600 Vrms/VDC continuous.

#### ■ Multi-Interval Measurement

- Mixed use of three types of measurement intervals is enabled within the system (measurement intervals are set for each module).

### Ease of Use.....

#### ■ Flexible System Configuration

By configuring modules, a system can be built or modified to utilize 4 to 1,200 channels, and measurement intervals of 10 ms to 60 s.

#### ■ Versatile PC-Based Software Options

Software developed by Yokogawa, an API, and a LabVIEW driver are available.

#### ■ Easy Software Setup

PC software developed by Yokogawa automatically identifies any connected MX100s.


#### ■ No Re-Wiring between Measurements

A removable terminal unit is available.

**MX100 is a data acquisition unit designed to operate as a front end for PCs. Data measured by MX100 is transferred to PCs in real-time.**

## Connection between a single MX unit and a single PC (measurement of 24 channels/10 ms or 60 channels/100 ms)

One MX unit enables data acquisition on up to 24 channels at a measurement interval of 10 ms or up to 60 channels at a measurement interval of 100 ms (six modules installed in both cases).

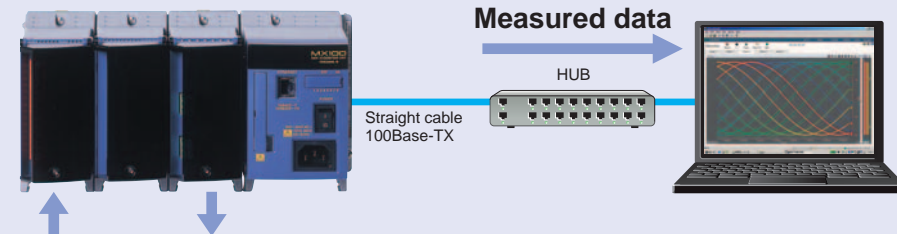

**Input signal:**  
 DC voltage  
 Thermocouple  
 RTD  
 Digital input  
 (Mixed input possible)

**Output signal:**  
 Digital output

### <Setting up the System>

The MX and PC are connected via a hub and a straight Ethernet cable. Alternatively, they can be connected using a cross cable alone, without using the hub.


### <PC Software>

In a one-to-one connection, the MX100 standard software included with the main module facilitates easy building of data acquisition environments.

One MX unit consists of a combination of a main module, input/output modules, and a base plate. This configuration centers on the main module. For details, refer to pages 4 and 5.

## Connection between multiple MX units and a single PC (for measurement of up to 1,200 channels and the use of MXLOGGER)

### Example of a system with multiple MX units:

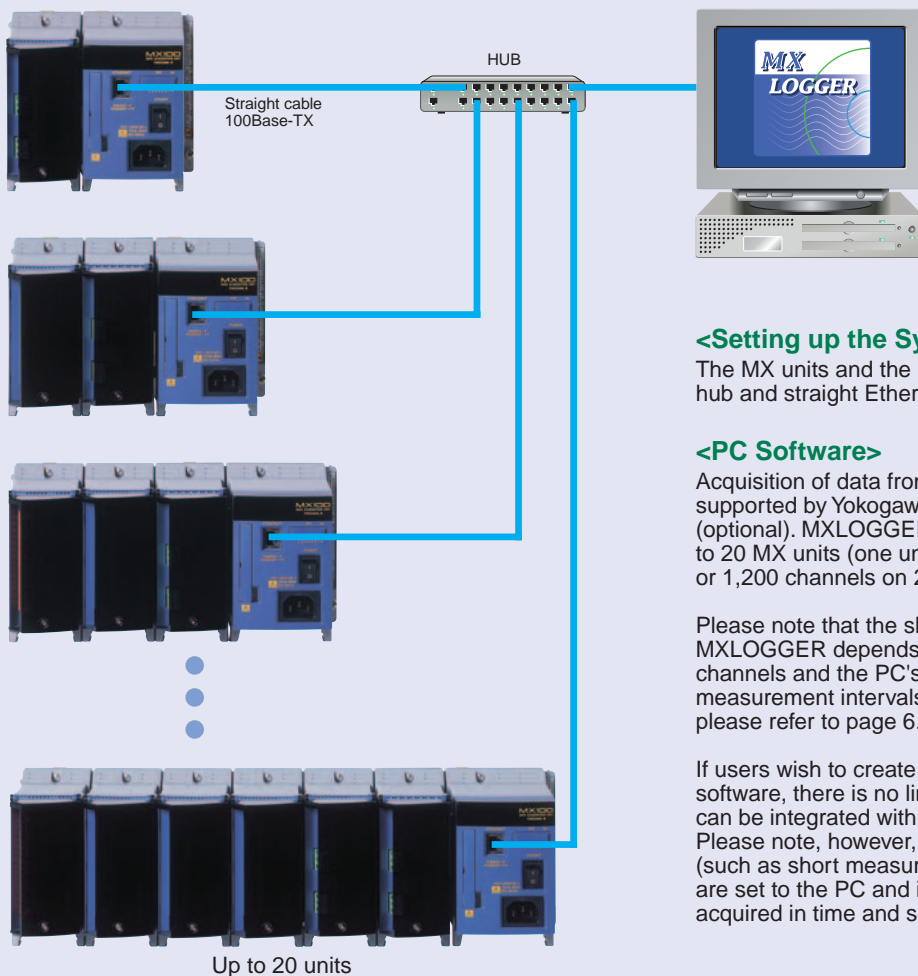

### <Setting up the System>

The MX units and the PC are connected by means of a hub and straight Ethernet cables.

### <PC Software>

Acquisition of data from multiple MX units is well-supported by Yokogawa's software "MXLOGGER" (optional). MXLOGGER enables data acquisitions of up to 20 MX units (one unit has inputs of up to 60 channels, or 1,200 channels on 20 units).

Please note that the shortest measurement interval of MXLOGGER depends on the system's total number of channels and the PC's performance. For guidelines on measurement intervals and the number of channels, please refer to page 6.


If users wish to create their own data acquisition software, there is no limit to the number of MX units that can be integrated with a single PC software element. Please note, however, that if conditions with heavy loads (such as short measurement intervals with many units) are set to the PC and its software, data will not be acquired in time and some data may be lost.

Up to 20 units



# Maximum Performance, and Ease of Use....

The MX is designed to enable desired measurement environments by combining three elements: the main module, input/output modules, and a base plate. The assembled unit can be utilized on the desktop as-is (the modules have legs). Please note that DIN rails are used for rack-mounting.

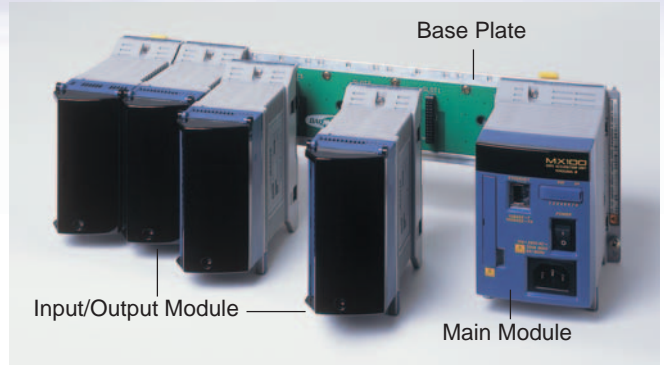

## Main Module (MX100)



The main module is the engine that controls data acquisition. It is equipped with a power supply, an Ethernet port, and a CompactFlash card slot. **One main module can accommodate up to six input/output modules. The user can choose up to six modules of any type.**

### Ethernet Port:

For communication with the PC. Automatic recognition of 100Base-TX or 10Base-T

### CF (CompactFlash) Card Slot:

With the CF Card, measured data is saved to the card if communication with the PC is interrupted. Since the card provides data backup, you do not have to worry about the possible loss of data even if the MX is configured for PC-based measurement.



### Data Backup Time by CF Card Size (Note: Minutes/hours/days are approximate.)

Number of saved channels	Measurement interval	32 M	128 M	512 M
10 channels	10 ms	2 hours	9 hours	36 hours
	100 ms	21 hours	3.5 days	15 days
	500 ms	4.5 days	18.5 days	75.5 days
	2 s	18 days	75.5 days	303 days
24 channels	10 ms	54 minutes	3.5 hours	15 hours
	100 ms	9 hours	37 hours	6 days
	500 ms	45 hours	7.5 days	31.5 days
	2 s	7.5 days	31.5 days	126 days
60 channels	10 ms	18 minutes	75 minutes	5 hours
	100 ms	3.5 hours	15 hours	2.5 days
	500 ms	18 hours	3 days	12.5 days
	2 s	3 days	12.5 days	50 days

## Input/Output Modules (MX110, MX115, MX125)

### Four-Channel High-Speed Universal Input Module MX110-UNV-H04

Note: All I/O modules are fitted with a swing-up terminal cover.




Shortest measurement interval: 10 ms;  
Maximum number of input channels: 4 channels;  
Mixed input of DC voltage, thermocouple, RTD, and digital input: possible.  
Please note that the shortest measurement interval for temperature is 50 ms for this module.

### Ten-Channel Medium-Speed Universal Input Module MX110-UNV-M10



Shortest measurement interval: 100 ms;  
Maximum number of input channels: 10 channels;  
Mixed input of DC voltage, thermocouple, RTD, and digital input: possible

### Ten-Channel High-Speed Digital Input Module MX115-D05-H10



If a single unit consists of this module only, measurement of 60 channels/10 ms is possible.  
Most suitable for measurement of digital input signals at many points inexpensively.

Shortest measurement interval: 10 ms;  
Maximum number of input channels: 10 channels;  
Digital input dedicated module.

### Ten-Channel Medium-Speed Digital Output Module MX125-MKC-M10




For use of alarm outputs, etc.

Shortest output interval: 100 ms;  
Maximum number of output channels: 10 channels;  
Digital output dedicated module.

# Hardware Configuration

## Base Plate (MX150)

The main module and input/output modules are connected by means of connectors on a base plate.

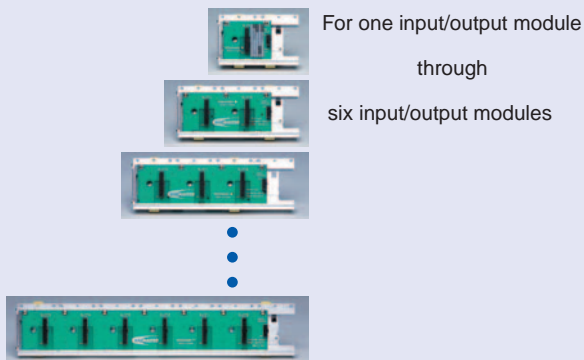

### <Using the Base Plate for Six Input/Output Modules>

Although the position for the main module is fixed, input/output modules can be configured in any position using the module connectors. One to six modules can be used.



Connector covers (772066) are available for vacant slots.

## Modules and Terminals

### <Attachable/Detachable Terminals>

All input terminals can be attached/detached. If the user provides multiple terminals, there is no need to perform rewiring every time measurement is carried out.

#### ■ Four-Channel High-Speed Universal Input Module MX110-UNV-H04



Clamp terminal (772064)

Each terminal can be attached/detached.

#### ■ Ten-Channel Medium-Speed Universal Input Module MX110-UNV-M10

#### ■ Ten-Channel High-Speed Digital Input Module MX115-D05-H10



Plate with clamp terminals (with RJC)(772063)  
MX115-D05-H10's plate with clamp terminals does not have RJC.  
RJC: Reference Junction Compensation

Each plate with terminals can be attached/detached.

#### ■ Ten-Channel Medium-Speed Digital Output Module MX125-MKC-M10




Clamp terminal (772065)

Each terminal can be attached/detached.

### <Screw Terminal Block>

A separate screw terminal block is available for the MX110-UNV-M10 Ten-Channel Medium-Speed Universal Input Module and the MX115-D05-H10 Ten-Channel High-Speed Digital Input Module.

Connection Cable (772062) between input modules and the screw terminal block

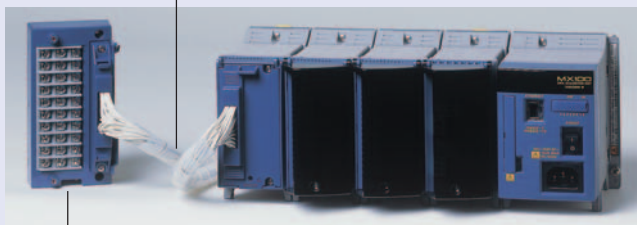

Screw Terminal Block (772061)

The screw terminal block is installed.

Detach the plate with clamp terminals from the MX110-UNV-M10 or MX115-D05-H10. Then, use the connection cable (772062) to connect the input module without the plate to the screw terminal block (772061).

The option code /NC can be added to the MX110-UNV-M10 and MX115-D05-H10 to indicate whether or not the plate with clamp terminals is included at the time of delivery. If the user requires only the screw terminal block and not the clamp terminals, please specify either MX110-UNV-M10/NC or MX115-D05-H10/NC.

### <Mounting of Racks or Panels Using the DIN Rail>



Bracket for mounting the DIN rail

Use the DIN rail for mounting on racks or panels. The DIN rail can be easily attached using the dedicated bracket. Two brackets come standard with the base plate (MX150).

# Maximum Performance, and Ease of Use.....

## High-Speed, Multi-Channel Capability

The table below provides reference information on the maximum number of measurable channels in relevant measurement intervals (when using Yokogawa's proprietary software):

Measurement interval	Maximum number of measurable channels	Measurable objects	PC Software		Number of Necessary Modules (example)		
			MX100 Standard Software	MXLOGGER	Main Module (MX100)	Four-Channel High-Speed Universal Input Module (MX110-UNV-H04)	Ten-Channel Medium-Speed Universal Input Module (MX110-UNV-M10)
10 ms	24 channels	DCV/DI	√	√	1	6	—
50 ms	24 channels	DCV/TC/RTD/DI	√	√	1	6	—
50 ms	120 channels	DCV/TC/RTD/DI	—	√	5	30	—
100 ms	60 channels	DCV/TC/RTD/DI	√	√	1	0	6
100 ms	300 channels	DCV/TC/RTD/DI	—	√	5	0	30
200 ms	500 channels	DCV/TC/RTD/DI	—	√	9	0	50
500 ms	600 channels	DCV/TC/RTD/DI	—	√	10	0	60
1000 ms	1200 channels	DCV/TC/RTD/DI	—	√	20	0	120

√ measurement that support is possible  
 — measurement that support is not possible.

The relationship between measurement intervals and the number of channels largely depends on the performance of the PC. The actual performance may differ from that shown in the table.


**<PC System Requirements> CPU: Pentium 4 3.2 GHz; Memory: 1 GB; OS: Windows 2000; Hard disk: 160 GB; Communication interface: Ethernet 100Base-TX**

## Multi-Interval Measurement

Three types of measurement intervals can be used in a single system in various combinations. Measurement intervals are specified for each module. It is also possible to set different types of input modules to the same measurement interval or to set the same type of input modules to different measurement intervals. Twelve measurement intervals are available as user-selectable options: 10 ms, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s, 5 s, 10 s, 20 s, 30 s and 60 s. Please note, however, that measurement intervals of 10/50 ms cannot be set to the Medium-speed Universal Input Module (MX110-UNV-M10).


### <Examples of Setting Measurement Intervals>

Multi-interval systems can be flexibly built for each module as shown in the figure below. Three colors (yellow, green, pink) are used to indicate the three types of measurement intervals.

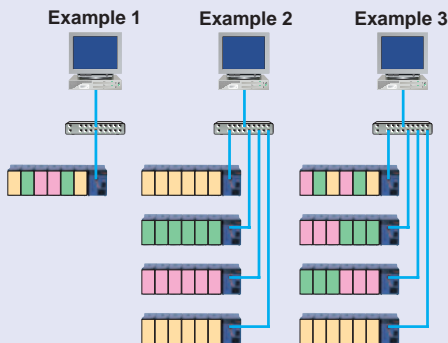

### <Monitor Window Using Yokogawa's Proprietary PC Software>

The window shows measurement values by measurement intervals. Measurement can be performed while confirming rapidly-changing signals and slowly-changing signals simultaneously.

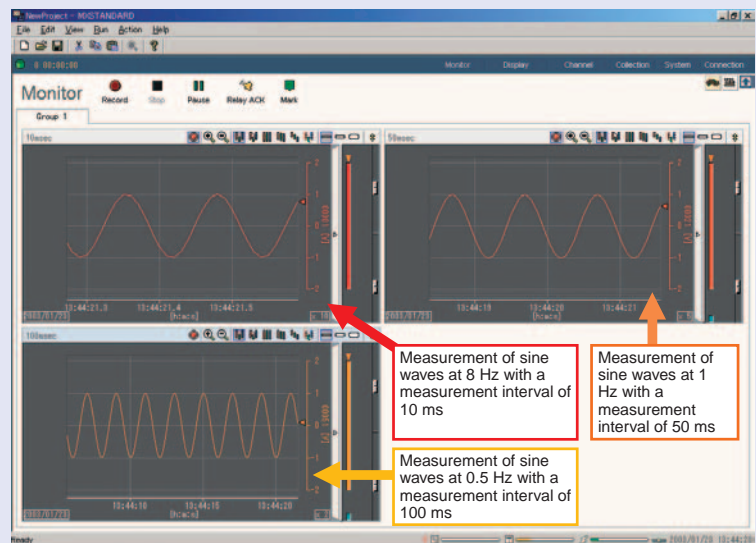

Measurement of sine waves at 8 Hz with a measurement interval of 10 ms


Measurement of sine waves at 1 Hz with a measurement interval of 50 ms

Measurement of sine waves at 0.5 Hz with a measurement interval of 100 ms

# Advanced Measurement Performance

## High Withstand Voltage (Reinforced Insulation)

Reinforced (double) insulation has been provided between the input terminals and the case to achieve a high withstand voltage of 600 Vrms/VDC (continuous). As shown below, each battery voltage can be measured even if the batteries are stacked to increase common-mode voltages.

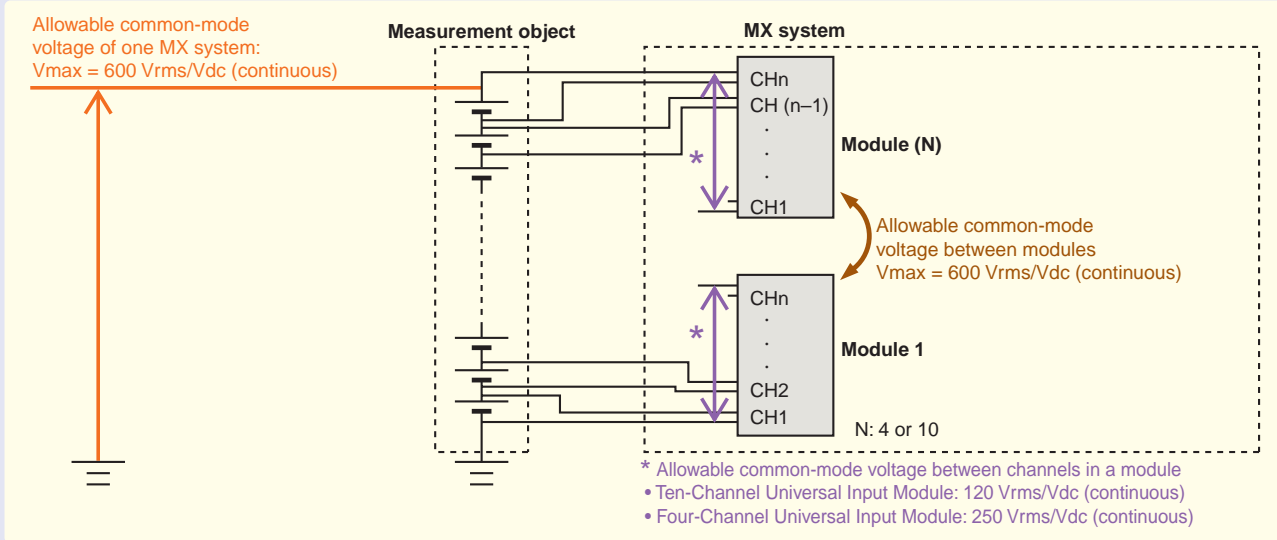

## Noise Rejection (MX110-UNV-H04)


MX input modules employ integrating A/D converters with superior noise rejection performance. In particular, the MX110-UNV-H04 Four-Channel High-Speed Universal Input Module incorporates an integrating A/D converter for each input channel, thereby exhibiting strong noise rejection performance in high-speed measurement. Moreover, the digital filtering function is effective on noises that cannot be fully rejected even with integrating A/D converters. Time constants can be selected from 5 to 100 measurement interval times. Therefore, filtering can be applied according to the noise to be rejected.

### <Example of Noise Rejection>

When the noise source in the left figure was applied to the MX, the result in the right figure was obtained. High-speed measurement can be stably performed even in noise environments.

#### • Noise source applied to MX

The noise signal was applied between H and L (in normal mode).

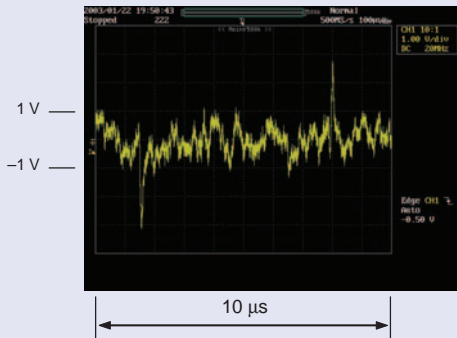


Sampling rate: 500 MS/s  
 Measurement using Yokogawa's Digital Oscilloscope DL1740.

#### • Output window of MX100 for noise inputs

Module used: MX110-UNV-H04 Four-Channel High-Speed Universal Input Module

Measurement with the range of 2 V (-2 V to +2 V), measurement interval of 50 ms, integral time "Auto" and filter "OFF"

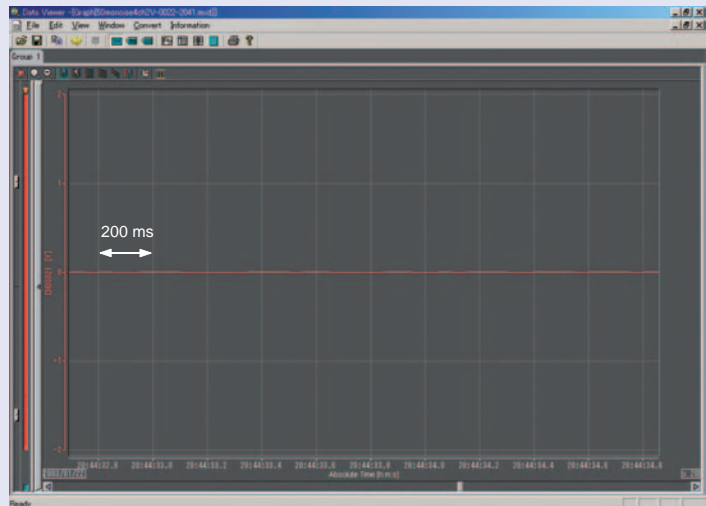

The MX Standard Software was used for PC software.



# Maximum Performance, and Ease of Use.....

## MX100 Standard Software (Standard Software for the Main Module MX100)


This software is used to connect a single MX unit for performing data acquisition (it is not possible to connect multiple MX units). It includes three software elements: integration monitor, viewer, and calibration.

### <Integration Monitor Software>

This software performs real-time monitoring and logging of measured data. It consists of six menus: Monitor Window, Detailed Display Setting, Channel Setting, Acquisition Condition, System Setting, and Connection/disconnection.


#### • Monitor Window

This window is used to monitor measured data in real-time. It enables waveform displays and digital displays.

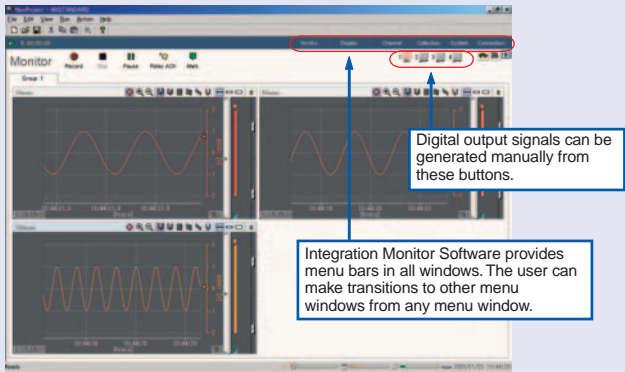


#### • Acquisition Condition

This menu is used to set various conditions (such as measurement intervals/data save intervals, measurement start/end conditions, or file name designation) for data acquisitions.

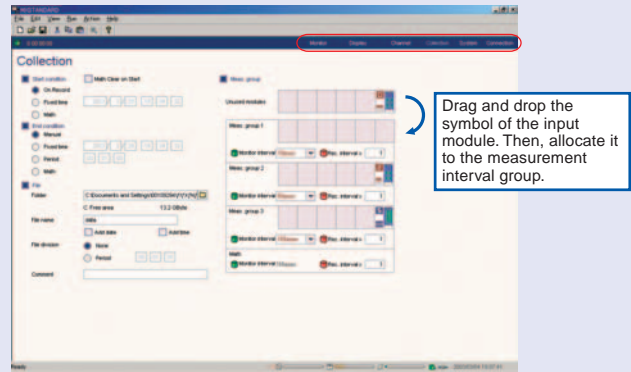

#### • Detailed Display Setting

This menu is used to set data display states (such as waveform colors) in the monitor window.

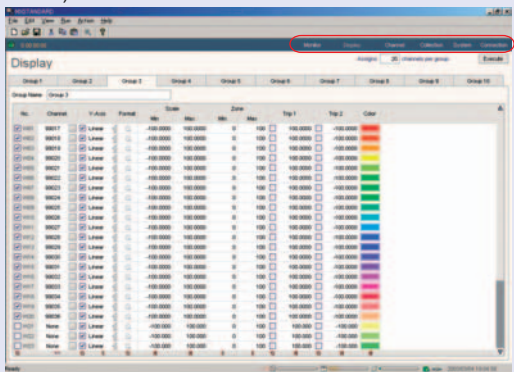


#### • System Setting

This menu is used to decide module configurations, etc. Module configurations are shown in easily understood diagrams.



#### • Channel Setting


This menu is used to enter individual settings (such as range settings) for each input channel or to set computation channels (such as the input of computing equations).

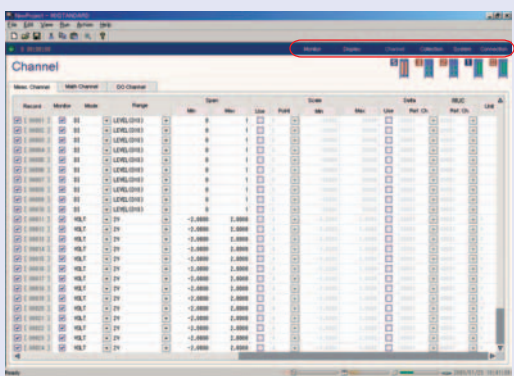




## <Viewer Software>

This software is intended to re-display saved data. It enables waveform displays, digital displays, cursor displays, interval arithmetic, and other functions.

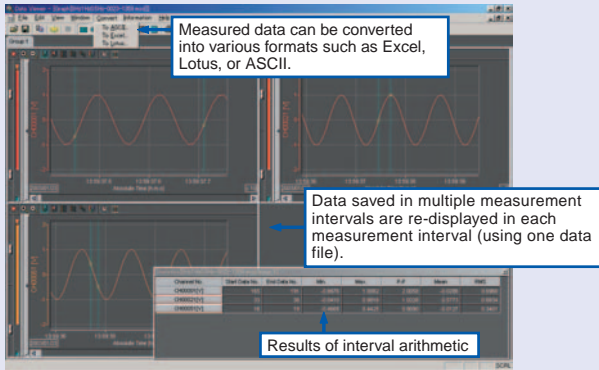

## <Calibration Software>

This software is intended to efficiently carry out the calibration of universal input modules.

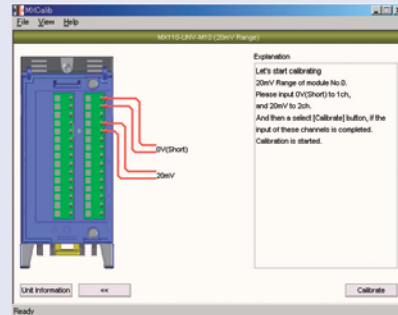

## MXLOGGER (Optional PC Software)


MXLOGGER is used to connect multiple MX units (up to 20 units) for data acquisition (one MX unit can also be connected). It consists of software elements (setting, logger (for saving data), monitor, and viewer) and the monitor server.

The monitor server function is used to enable connections with Yokogawa's data logging software, "DAQLOGGER." It is effective when combining MX units with Yokogawa's data acquisition equipment such as DARWIN and DAQSTATION. (DAQLOGGER is scheduled to be capable of supporting MXLOGGER's monitor server function in July 2003.)

### Example of building a mixed system of MX100 and DARWIN:

DAQLOGGER becomes a client of MXLOGGER to simultaneously retrieve data from MXLOGGER and from DARWIN.

Note: The shortest data acquisition interval of DAQLOGGER is one second. If it is necessary to save data with a measurement interval of less than one second, data needs to be saved by MXLOGGER.

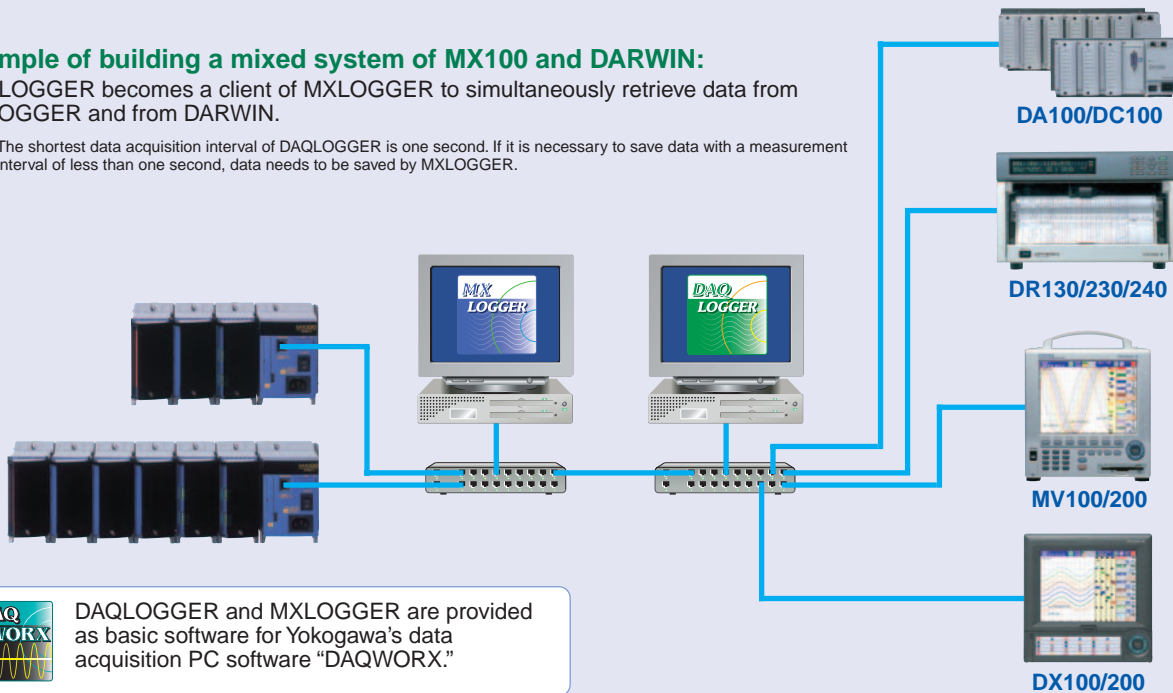

## API for MX100/DARWIN (Optional)

If users wish to create their own data acquisition software, please use this API. The API consists of a suite of functions to communicate with MX100/DARWIN. The suite of functions contains DLL (dynamic link library). API makes it possible to create data acquisition software dedicated to the MX, or data acquisition software combining the MX and DARWIN, or data acquisition software dedicated to DARWIN.

Three languages (Visual C, Visual C++, and Visual Basic) are supported.

# Hardware Specifications

## Common Specifications

### Normal operating conditions:

- Operating temperature range: 0-50°C
- Operating humidity range: 20-80% RH for 0-40°C, 10-50% RH for 40-50°C
- Rated power supply voltage: AC power supply, 100-240 VAC
- Range of operating power supply voltage: AC power supply, 90-250 VAC
- Power supply frequency: 50 Hz ± 2%, 60 Hz ± 2%
- Power consumption: Up to approximately 70 VA when six modules are used
- Installation method: Desktop/loor and panel mount (using the DIN rail)
- Supported standards:

CSA	Obtained CSA22.2 No.1010.1, Installation category (Overvoltage category): II, Degree of pollution: 2
UL	Obtained UL61010B-1 (CSA NRTL/C)
CE	EMC directive EN61326, EN1000-3-2, EN5011 Class A Group 1
	Low voltage directive EN61010-1, Measurement category: II, Degree of pollution: 2
C-Tick	AS/NZS 2064 Class A Group 1

## Model-Specific Specifications

### Main Module (MX100)

- Main functions: Control of the power supply and input/output modules, communication with the PC, storage of data on the CF card (during a communication failure)
- Number of maximum connectable input/output modules: 6 (arbitrary for six modules or less)
- Measurement interval: Up to three types can be set per system (multi-interval). Types of measurement intervals are 10/50/100/200/500 ms, 1/2/5/10/20/30/60 sec. Note that configurable measurement intervals differ depending on modules.
- Transfer interval of measured data to the PC: Minimum 100 ms
- DO interval (update interval): 100 ms (not synchronized with timing every measurement interval of 100 ms)
- Filter function: First-order lag filter. The function can be set for each channel. Time constant = measurement interval × N (where N is any number of the following: 5, 10, 20, 25, 40, 50, and 100).
- Input computation function (computation function that can be executed in the main module)
  - Computation of differences between channels: differential computation between arbitrary channels (DCV, TC, RTD, DI, scaling)
  - Linear scaling computation
    - Possible range for scaling: DCV, TC, RTD, DI
    - Possible scope for scaling: -30,000 to 30,000
    - Position of the decimal point: any digit
- Alarm (alarm function can be executed in the main module. This function is enabled even during a communication failure).
  - Alarm types: Upper limit, lower limit, differential upper limit, and differential lower limit
  - Number of settings: two items per channel
  - Possible range for alarm setting: DCV, TC, RTD, DI, scaling
  - Hysteresis: Alarm "ON/OFF" values are set arbitrarily.
  - Number of alarm output points: 10-60 points according to the number of mounted "DO" modules
  - Output mode: Excitation/non-excitation, OR, Hold/non-Hold, command output
- Saving the data
  - Save function: Backup in the event of a communication failure during data acquisitions by the PC.
  - Supported external media: CF Card (up to 2 Gbytes) Type, I, II × one slot
  - Save trigger: When the timeout value (60 s) is exceeded if communication is interrupted during the PC's data acquisitions.
  - Save channel: Monitor "ON" channel
  - Save interval: Data is saved automatically (approximately every 60 s)
  - Stopping the save function: If the PC's data acquisition is recovered or if the CF Switch is pressed.
  - Data guarantee during a power failure: Guaranteed until data is written immediately before the MX is turned off (for example, power failure). The backup operation will not continue after the system recovers from a power failure.
- Indication
  - LED: Indication of Ethernet status.
  - 7-segment indication: MX status indication by 7 segments in 2 digits (unit no., operation status indication, indication of error occurrence, indication of messages concerning the CF Card, etc.)
- Communication functions
  - Interface: 100Base-TX/10Base-T (automatic detection) Ethernet
  - Basic protocol: TCP, IP, UDP, ARP, ICMP
  - Transmission function: Transmission of measured values and setting values
  - Receiving function: Reception of setting values
- General specifications
  - Power consumption: Approximately 8W for the main module only
  - Insulation resistance: 20 MΩ or more (500 VDC) between the power supply terminal and the ground terminal
  - Withstand voltage: 1500 VAC (50/60 Hz) between the power supply terminal and the ground terminal, one minute
  - External dimension: Approximately 92 × 131 × 137 mm
  - Weight: Approximately 0.85 kg
- Other functions
  - Switch: 8-bit dip switch (for IP address initialization, etc.)
  - CF switch: Switch to stop the data writing operations.
- Base Plate (MX150)
  - Number of main modules that can be equipped: 1 (always equipped)
  - Number of I/O modules that can be equipped: 1-6 (to be specified according to the suffix codes)
- Four-Channel High-Speed Universal Input Module (MX110-UNV-H04)
  - Types of measurement: DC voltage, thermocouple, RTD, DI (non-voltage contact, level (5 V logic))
  - Number of measurement points: 4 (A/D to be equipped independently for each channel)
  - Input method: Floating unbalanced input, insulation between channels
  - A/D resolution: ±20000±6000 (16-bit A/D is used)
  - Measurement interval: 10/50/100/200/500 ms, 1/2/5/10/20/30/60 s
  - A/D integral time: 1.67/16.67/20/36.67/100/200 ms, AUTO
  - A/D integral time is determined by measurement intervals

### Measurement Ranges and Accuracies

Input	Type	Rated measurement range	Measurement accuracy integral time 16.67 ms or more	Measurement accuracy integral time 1.67 ms	Maximum resolution (1 digit)		
Voltage	20 mV	-20 mV to +20 mV	±(0.05% of rdg. + 5 digits)	±(0.1% of rdg. + 25 digits)	1 μV		
	60 mV	-60 mV to +60 mV	±(0.05% of rdg. + 2 digits)		10 μV		
	200 mV	-200 mV to +200 mV	±(0.05% of rdg. + 5 digits)		100 μV		
	2 V	-2 V to +2 V	±(0.05% of rdg. + 5 digits)	±(0.1% of rdg. + 10 digits)	100 μV		
	6 V	-6 V to +6 V			1 mV		
	20 V	-20 V to +20 V	±(0.05% of rdg. + 2 digits)		1 mV		
Thermocouple RJC accuracy not included. Burn-out setting is "OFF".	R	0.0 to 1760.0°C	±(0.05% of rdg. + 1°C) However, R, S: 0 to 100°C: ±3.7°C 100 to 300°C: ±1.5°C 300 to 600°C: ±2°C Less than 400°C: accuracy is not guaranteed		Measurement not possible	0.1°C	
	S	0.0 to 1820.0°C					
	B	0.0 to 1820.0°C					
	K	-200.0 to 1370.0°C	±(0.05% of rdg. + 0.7°C) However, -200 to -100°C: ±(0.05% of rdg. + 1°C)				
	E	-200.0 to 800.0°C					
	J	-200.0 to 1100.0°C	±(0.05% of rdg. + 0.5°C) However, J, L: -200 to -100°C: ±(0.05% of rdg. + 0.7°C)				
	T	-200.0 to 400.0°C					
	L	-200.0 to 900.0°C					
	U	-200.0 to 400.0°C					
	N	0.0 to 1300.0°C	±(0.05% of rdg. + 0.7°C)				
	W	0.0 to 2315.0°C	±(0.05% of rdg. + 1°C)				
	KpvsAu7Fe	0.0 to 300.0K	±(0.05% of rdg. + 0.7K)			0.1K	
	RTD measurement current (1 mA)	Pt100	-200.0 to 600.0°C	±(0.05% of rdg. + 0.3°C)		Measurement not possible	0.1°C
		JPt100	-200.0 to 550.0°C				
Pt100: high resolution		-140.00 to 150.00°C	±(0.05% of rdg. + 0.3°C)		Measurement not possible	0.01°C	
JPt100: high resolution		-140.00 to 150.00°C					
Ni100SAMA		-200.0 to 250.0°C					
Ni100 DIN		-60.0 to 180.0°C	±(0.05% of rdg. + 0.3°C)		Measurement not possible	0.1°C	
RTD measurement current (2 mA)	Ni120	-70.0 to 200.0°C					
	Pt100	-200.0 to 250.0°C	±(0.05% of rdg. + 0.3°C)		Measurement not possible	0.1°C	
	JPt100	-200.0 to 250.0°C					
	Pt100: high resolution	-140.00 to 150.00°C	±(0.05% of rdg. + 0.3°C)		Measurement not possible	0.01°C	
	JPt100: high resolution	-140.00 to 150.00°C					
	Pt50	-200.0 to 550.0°C	±(0.05% of rdg. + 0.3°C)				
DI	Cu10 GE	-200.0 to 300.0°C					
	Cu10 L&N	-200.0 to 300.0°C					
	Cu10 WEED	-200.0 to 300.0°C	±(0.1% of rdg. + 0.7°C)		Measurement not possible	0.1°C	
	Cu10 BAILEY	-200.0 to 300.0°C					
	J263B	0.0 to 300.0 K	±(0.05% of rdg. + 0.3K)		Measurement not possible	0.1K	
Level	Vth = 2.4 V			Threshold level accuracy ±0.1 V			
	Contact		100 Ω or less: ON, 10 kΩ or more: OFF				

### Special Input Ranges (that can be used in MXLOGGER)

Input	Type	Rated measurement range	Measurement accuracy integral time 16.67 ms or more	Measurement accuracy integral time 1.67 ms	Maximum resolution (1 digit)
Voltage	60 mV	0 to +60 mV	±(0.05% of rdg. + 20 digits)	±(0.1% of rdg. + 100 digits)	1 μV
	1 V	-1 V to +1 V	±(0.05% of rdg. + 2 digits)	±(0.1% of rdg. + 10 digits)	100 μV
	6 V	0 to +6 V	±(0.05% of rdg. + 20 digits)	±(0.1% of rdg. + 100 digits)	100 μV

- Supported thermocouple: PLATINEL, PR40-20, NiNiMo, WRe3-25, W/WRe26, N (AWG14)
- Supported RTD: PT100 (high noise resistance), JPt100 (high noise resistance), Cu10 (at 20°C, a = 0.00392), Cu10 (at 20°C, a = 0.00393), Cu25 (at 0°C, a = 0.00425), Cu53 (at 0°C, a = 0.00426035), Cu100 (at 0°C, a = 0.00425), Pt25, Cu10 GE (high resolution), Cu10 L&N (high resolution), Cu10 WEED (high resolution), Cu10 BAILEY (high resolution)
- Reference junction compensation: External/internal switchover can be performed for each channel.
- Reference junction compensation accuracy: During the measurement of 0°C or more and during the input terminal temperature balance  
Type R, S, W: ±1°C  
Type K, J, E, T, N, L, U: ±0.5°C  
(Note) Internal reference junction compensation of Type B is fixed to 0°C.
- Maximum input voltage: 200 mV DC range or less, thermocouple, RTD, DI (non-voltage contact): ±10 VDC (continuous)
- Other measurement ranges: ±120 VDC (continuous)
- Normal-mode voltage: DCV, TC, DI (level): 1.2 times of rated range or less (50/60 Hz, peak values including signals)
- RTD 100 Ω system: 50 mV peak
- RTD 10, 25, 50 Ω systems: 10 mV peak
- Normal-mode rejection ratio (NMRR): When the integral time is 16.67 ms or more: 40 dB or more (50/60 Hz ±0.1%)  
When the integral time is 1.67 ms: 50/60 Hz is not rejected.
- Common-mode voltage: 600 VACrms (50/60 Hz), reinforced (double) insulation
- Common-mode rejection ratio (CMRR): 120 dB or more when the integral time is 16.67 ms or more. 80 dB or more when the integral time is 1.67 ms (50/60 Hz ±0.1%, 500 Ω imbalance, between the minus measurement terminal and the ground).
- Common mode voltage between channels: 250 VACrms (50/60 Hz), double insulation
- Noise rejection: Rejection by the integrating A/D converter and the use of low pass filters
- Input resistance: 10 MΩ or more for the DC voltage of 200 mV range or less and also for the thermocouple range. Approximately 1 MΩ if the DC voltage is 2 V range or more. Approximately 1 MΩ while measurement is stopped.
- Insulation resistance: 20 MΩ or more between the input and the ground (500 VDC)
- Input bias current: 10 nA or less (except for the burn-out setting)
- Withstand voltage: 2300 VAC (50/60 Hz) between input terminals, one minute  
3700 VAC (50/60 Hz) between an input terminal and the ground, one minute
- Input signal source resistance: 2 kΩ or less for DC voltage and thermocouple  
10 Ω or less per cable for RTD 50 Ω or 100 Ω systems  
1 Ω or less per cable for RTD 10 Ω or 25 Ω systems
- Thermocouple burn-out: Superposed electric current system, detection within the thermocouple range ("ON/OFF" possible)
- Parallel capacity during RTD: 0.01 μF or less
- Power consumption: Approximately 3 W
- External dimension: Approximately 57 × 131 × 150 mm (including the terminal cover)
- Weight: Approximately 0.5 kg
- Terminal type: Clamp terminal. Applicable cable size is 0.2-2.5 mm<sup>2</sup> (AWG24-12)

## • Ten-Channel Medium-Speed Universal Input Module (MX110-UNV-M10)

- Types of measurement: DC voltage, thermocouple, RTD (non-voltage contact, level (5 V logic))
- Number of measurement points: 10 (scanning of 10 channels with one A/D)
- Input method: Floating unbalanced input, insulation between channels (Note that RTD is common among "b" terminals.)
- A/D resolution:  $\pm 20000 \pm 6000$  (16-bit A/D is used)
- Measurement interval: 100/200/500 ms, 1/2/5/10/20/30/60 s
- A/D integral time: 1.67/16.67/20/36.67/100/200 ms, AUTO, A/D integral time is determined by measurement intervals.
- Measurement Ranges and Accuracies

Input	Type	Rated measurement range	Measurement accuracy integral time 16.67 ms or more	Measurement accuracy integral time 1.67 ms	Maximum resolution (1 digit)
Voltage	20 mV	-20 mV to +20 mV	$\pm(0.05\% \text{ of rdg.} + 5 \text{ digits})$	$\pm(0.1\% \text{ of rdg.} + 25 \text{ digits})$	1 $\mu\text{V}$
	60 mV	-60 mV to +60 mV	$\pm(0.05\% \text{ of rdg.} + 2 \text{ digits})$		10 $\mu\text{V}$
	200 mV	-200 mV to +200 mV			100 $\mu\text{V}$
	2 V	-2 V to +2 V	$\pm(0.05\% \text{ of rdg.} + 5 \text{ digits})$	$\pm(0.1\% \text{ of rdg.} + 10 \text{ digits})$	1 mV
	6 V	-6 V to +6 V			1 mV
	20 V	-20 V to +20 V	$\pm(0.05\% \text{ of rdg.} + 2 \text{ digits})$		1 mV
Thermocouple RJC accuracy not included.	R	0.0 to 1760.0°C	$\pm(0.05\% \text{ of rdg.} + 1^\circ\text{C})$ However, R, S: 0 to 100°C: $\pm 3.7^\circ\text{C}$ 100 to 300°C: $\pm 1.5^\circ\text{C}$ B: 400 to 800°C: $\pm 2^\circ\text{C}$ Less than 400°C: accuracy is not guaranteed	$\pm(0.1\% \text{ of rdg.} + 4^\circ\text{C})$ However, R, S: 0 to 100°C: $\pm 10^\circ\text{C}$ 100 to 300°C: $\pm 5^\circ\text{C}$ B: 400 to 800°C: $\pm 7^\circ\text{C}$ Less than 400°C: accuracy is not guaranteed	0.1°C
	S				
	B	0.0 to 1820.0°C			
	K	-200.0 to 1370.0°C	$\pm(0.05\% \text{ of rdg.} + 0.7^\circ\text{C})$ However, -200 to -100°C: $\pm(0.05\% \text{ of rdg.} + 1^\circ\text{C})$	$\pm(0.1\% \text{ of rdg.} + 3.5^\circ\text{C})$ However, -200 to -100°C: $\pm(0.1\% \text{ of rdg.} + 6^\circ\text{C})$	
	E	-200.0 to 800.0°C	$\pm(0.05\% \text{ of rdg.} + 0.5^\circ\text{C})$	$\pm(0.1\% \text{ of rdg.} + 2.5^\circ\text{C})$	
	J	-200.0 to 1100.0°C	However, J, L: -200 to -100°C: $\pm(0.05\% \text{ of rdg.} + 0.7^\circ\text{C})$	However, J, L: -200 to -100°C: $\pm(0.1\% \text{ of rdg.} + 5^\circ\text{C})$	
	T	-200.0 to 400.0°C			
	L	-200.0 to 900.0°C			
	U	-200.0 to 400.0°C			
	N	0.0 to 1300.0°C	$\pm(0.05\% \text{ of rdg.} + 0.7^\circ\text{C})$	$\pm(0.1\% \text{ of rdg.} + 3.5^\circ\text{C})$	
	W	0.0 to 2315.0°C	$\pm(0.05\% \text{ of rdg.} + 1^\circ\text{C})$	$\pm(0.1\% \text{ of rdg.} + 7^\circ\text{C})$	
	RTD measurement current (1 mA)	KpvsAu7Fe	0.0 to 300.0K	$\pm(0.05\% \text{ of rdg.} + 0.7K)$	$\pm(0.1\% \text{ of rdg.} + 3.5K)$
Pt100		-200.0 to 600.0°C	$\pm(0.05\% \text{ of rdg.} + 0.3^\circ\text{C})$	$\pm(0.1\% \text{ of rdg.} + 1.5^\circ\text{C})$	0.1°C
JPt100		-200.0 to 550.0°C			
Pt100: high resolution		-140.00 to 150.00°C	$\pm(0.05\% \text{ of rdg.} + 0.3^\circ\text{C})$	$\pm(0.1\% \text{ of rdg.} + 1.5^\circ\text{C})$	0.01°C
JPt100: high resolution		-140.00 to 150.00°C			
Ni100SAMA		-200.0 to 250.0°C			
Ni100 DIN		-60.0 to 180.0°C	$\pm(0.05\% \text{ of rdg.} + 0.3^\circ\text{C})$	$\pm(0.1\% \text{ of rdg.} + 1.5^\circ\text{C})$	
Ni120		-70.0 to 200.0°C			
Pt50		-200.0 to 550.0°C			
Cu10 GE		-200.0 to 300.0°C			
Cu10 L&N		-200.0 to 300.0°C	$\pm(0.1\% \text{ of rdg.} + 2^\circ\text{C})$	$\pm(0.2\% \text{ of rdg.} + 5^\circ\text{C})$	
Cu10 WEED		-200.0 to 300.0°C			
Cu10 BAILEY	-200.0 to 300.0°C				
DI	J263B	0.0 to 300.0K	$\pm(0.05\% \text{ of rdg.} + 0.3K)$	$\pm(0.1\% \text{ of rdg.} + 1.5K)$	0.1K
	Level	Vth = 2.4 V	Threshold level accuracy $\pm 0.1 \text{ V}$		
	Contact	1 k $\Omega$ or less: ON, 100 k $\Omega$ or more: OFF (parallel capacity is 0.01 $\mu\text{F}$ or less)			

## • Special Input Ranges (that can be used in MXLOGGER)

Input	Type	Rated measurement range	Measurement accuracy integral time 16.67 ms or more	Measurement accuracy integral time 1.67 ms	Maximum resolution (1 digit)
Voltage	60 mV	0 to +60 mV	$\pm(0.05\% \text{ of rdg.} + 20 \text{ digits})$	$\pm(0.1\% \text{ of rdg.} + 100 \text{ digits})$	1 $\mu\text{V}$
	1 V	-1 V to +1 V	$\pm(0.05\% \text{ of rdg.} + 2 \text{ digits})$	$\pm(0.1\% \text{ of rdg.} + 10 \text{ digits})$	100 $\mu\text{V}$
	6 V	0 to +6 V	$\pm(0.05\% \text{ of rdg.} + 20 \text{ digits})$	$\pm(0.1\% \text{ of rdg.} + 100 \text{ digits})$	100 $\mu\text{V}$

- Supported thermocouple: PLATINEL, PR40-20, NiNiMo, WRe3-25, W/WRe26, N(AWG14) Cu10 (at 20°C,  $\alpha = 0.00392$ ), Cu10 (at 20°C,  $\alpha = 0.00393$ ), Cu25 (at 0°C,  $\alpha = 0.00425$ ), Cu53 (at 0°C,  $\alpha = 0.0042635$ ), Cu100 (at 0°C,  $\alpha = 0.00425$ ), Pt25, Cu10 GE (high resolution), Cu10 L&N (high resolution), Cu10 WEED (high resolution), and Cu10 BAILEY (high resolution)
- Reference junction compensation: External/internal switchover can be performed for each channel.
- Reference junction compensation accuracy: During the measurement of 0°C or more and during the input terminal temperature balance  
Type R, S, W:  $\pm 1^\circ\text{C}$   
Type K, J, E, T, N, L, U:  $\pm 0.5^\circ\text{C}$   
(Note) Internal reference junction compensation for Type B is fixed to 0°C.

- Maximum input voltage: 200 mV DC range or less, thermocouple, RTD, DI (CONT):  $\pm 10 \text{ V DC}$   
Other measurement ranges:  $\pm 120 \text{ VDC}$
- Normal-mode voltage: DCV, TC, DI (level): 1.2 times of the rated range or less (50/60 Hz, peak values including signals)  
RTD 100  $\Omega$  system: 50 mV peak  
RTD 10, 25, 50  $\Omega$  systems: 10 mV peak
- Normal-mode rejection ratio (NMRR): 40 dB or more when the integral time is 16.67 ms or more (50/60 Hz  $\pm 0.1\%$ )  
50/60 Hz is not rejected when the integral time is 1.67 ms.
- Common-mode voltage: 600 VACrms (50/60 Hz), reinforced (double) insulation
- Common-mode rejection ratio (CMRR): 120 dB or more when the integral time is 16.67 ms or more.  
80 dB or more when the integral time is 1.67 ms (50/60 Hz  $\pm 0.1\%$ , 500  $\Omega$  imbalance, between the minus measurement terminal and the ground)
- Common-mode voltage between channels: 120 VACrms (50/60 Hz)
- Noise rejection: Rejection by an integrating A/D converter and the use of low pass filters
- Input resistance: 10 M $\Omega$  or more for the DC voltage of 200 mV range or less and also for the thermocouple range  
Approximately 1 M $\Omega$  if the DC voltage is in the 2 V range or more
- Insulation resistance: 20 M $\Omega$  or more between the input and the ground (500 VDC)
- Input bias current: 10 nA or less (except for the burn-out setting)
- Withstand voltage: 1000 VAC (50/60 Hz) between input terminals, one minute.  
3700 VAC (50/60 Hz) between an input terminal and the ground, one minute.
- Input signal source resistance: 2 k $\Omega$  or less for DC voltage and thermocouple.  
10  $\Omega$  or less per cable for RTD 50  $\Omega$  or 25  $\Omega$  systems.  
1  $\Omega$  or less per cable for RTD 10  $\Omega$  or 25  $\Omega$  systems.
- Thermocouple burn-out: Checking of the burn-out at a detection interval specified for each measurement interval
- Parallel capacity during RTD: 0.01  $\mu\text{F}$  or less
- Power consumption: Approximately 1.2 W

- External dimension: Approximately 57  $\times$  131  $\times$  150 mm (including the terminal cover)
- Weight: Approximately 0.5 kg
- Terminal type: Clamp terminal. Applicable cable size: 0.14-1.5 mm<sup>2</sup> (AWG26-16)

## • Ten-Channel High-Speed Digital Input Module (MX115-D05-H10)

- Input type: Non-voltage contact, open collector, level (5 V logic)
- Number of measuring points: 10
- Terminal type: Clamp terminal. Applicable cable size: 0.14-1.5 mm<sup>2</sup> (AWG26-16)
- Input format: Pull-up at approximately 5 V/approximately 5 k $\Omega$ . No insulation between channels
- Measurement interval: to be selected from 10/50/100/200/500 ms or 1/2/5/10/20/30/60 s
- Minimum detection pulse width: two times or more of a measurement interval
- Input threshold level: Non-voltage contact, open collector: "On" for 100  $\Omega$  or less, "Off" for 100 k $\Omega$  or more  
Level (5 V logic): "Off" for 1 V or less, "On" for 3 V or more
- Hysteresis width: Approximately 0.1 V
- Rated contact for connection to input terminals, rated transistor: Rated contact with 15 VDC or more and 30 mA or more  
Rated transistor with Vce > 15 Vdc and Ic > 30 mA
- Insulation resistance: 20 M $\Omega$  or more (500 VDC) between an input terminal and the ground
- Withstand voltage: 2300 VAC between an input terminal and the ground, one minute
- Power consumption: Approximately 1.5 W
- External dimension: Approximately 57  $\times$  131  $\times$  150 mm (including the terminal cover)
- Weight: Approximately 0.5 kg

## • Ten-Channel Medium-Speed Digital Output Module (MX125-MKC-M10)

- Number of output points: 10
- Terminal type: Clamp terminal. Applicable cable size for connectors: 0.08-2.5 mm<sup>2</sup> (AWG28-12)  
"A" contact (SPST)
- Contact mode: output per 100 ms
- Update interval: 250 VDC / 0.1 A, 250 VAC / 2 A, 30 VDC / 2 A (resistance load)
- Contact capacity: 20 M $\Omega$  or more (500 VDC) between an output terminal and the ground
- Insulation resistance: 20 M $\Omega$  or more (500 VDC) between output terminals
- Withstand voltage: 2300 VAC between an output terminal and the ground, one minute  
2300 VAC between output terminals, one minute
- Power consumption: Approximately 2 W (when all relays are turned on)
- External dimension: Approximately 57  $\times$  131  $\times$  150 mm (including the terminal cover)
- Weight: Approximately 0.5 kg
- Others: The excitation/non-excitation switchover and Hold/non-Hold switchover are available.

## PC Software Specifications

### • MX100 Standard Software (attached to the main module of MX100): for connection with one MX unit

- Integration Monitor (main functions): Setting of the basic connection, setting of various conditions (range, interval, computation, tag), monitor display (digital, trend), 32 channels in one group, 10 groups, logging, computation function (60 channels), alarm output, manual DO, etc.
- Viewer (main functions): Re-display of saved data files, 32 channels in one group, 50 groups, data synchronization processing, file merge display (limited to files that can be merged), multi-interval supported, graph, and digital display/print, etc.
- Calibration software (main function): calibration function
- Operating environment  
CPU: Intel Pentium II 400 MHz or more (recommended: Pentium III and 1 GHz or more)  
Memory: 256 MB or more (recommended: 512 MB or more)  
OS: Windows NT 4.0/2000/XP (recommended)  
Hard disk capacity: Free space of 50 MB or more (recommended: Hard disk with free space of 1 GB or more that operates at maximum speed)  
Communication interface: Ethernet that can be used for Windows (recommended: 100 Base-TX supported)  
CD-ROM drive: CD-ROM drive that can be used for Windows  
Printer: printer that can be used for Windows (to be used for printing)

### • MXLOGGER (optional)

- This is used to connect multiple MX units. Up to 20 units can be connected.
- Setting/Logger (main functions): Setting of the basic connection, setting of various conditions (range/alarm, interval, computation), project functions, logging, computation function (60 channels, computation across units possible), alarm output, file split function save, manual DO, activation of various types of software, etc.
- Monitor (main functions): Display-related settings, 32 channels in one group, 50 groups, monitor displays (trend, digital, meter, alarm), multi-interval supported, temporary suspension, tag, tag comment, channel display switchover, marking function, etc.
- Viewer (main functions): Re-display of saved data files, data synchronization processing, file merge display (limited to files that can be merged), 32 channels in one group, 50 groups, multi-interval supported, graph, and digital display/print, etc.
- Monitor Server (main functions): retention of 1,800-point data/channels, connection with DAQLLOGGER possible, etc.
- Operating environment  
CPU: Intel Pentium III 800 MHz or more (recommended: Pentium 4 and 1.6 GHz or more)  
Memory: 512 MB or more (recommended: 1 GB or more)  
OS: Windows NT 4.0/2000/XP (recommended)  
Hard disk capacity: Free space of 100 MB or more (recommended: Hard disk with free space of 2 GB or more that operates at maximum speed)  
Communication interface: Ethernet that can be used for Windows (recommended: 100 Base-TX supported)  
CD-ROM drive: CD-ROM drive that can be used for Windows  
Printer: printer that can be used for Windows (to be used for printing)

### • API for MX100/DARWIN (optional): a suite of functions for creating PC software

- Supported models: MX100/DARWIN series
- Supported OS: Windows 98/NT 4.0 SP3 or later/2000/XP (recommended) Communication system: TCP/IP (Ethernet)
- User development environment: MS Visual Studio 6.0 SP5 or later (recommended)
- Supported language: Visual C, Visual C++, Visual Basic



## Model Name

Model	Suffix Code	Description
MX100		Main module
IM language	-E	English (with English instruction manual)
Power supply voltage	-1	100 VAC-240 VAC
Power supply inlet, power supply cord	D	3-pin power intel with UL/CSA cable
	F	3-pin power intel with VDE cable
	R	3-pin power intel with SAA cable
	Q	3-pin power intel with BS cable
	H	3-pin power inlet with CCC cable
	W	Screw terminal (power supply cord is not attached)

Model	Suffix Code	Option Code	Description
MX110			Analog input module for MX
Input type	-UNV		DCV/TC/DI/RTD
Measurement interval, number of channels	-H04		4 channels, high speed (shortest measurement interval: 10 ms)
	-M10		10 channels, medium speed (shortest measurement interval: 100 ms) *
Option		/NC	The plate with clamp terminals is not attached. *

\*1 "/NC" can be specified only when "-M10" is specified.

Model	Suffix Code	Option Code	Description
MX115			Digital input module for MX
Input type	-D05		Non-voltage contact, level (5 V logic), open collector
Measurement interval, number of channels	-H10		10 channels, high speed (shortest measurement interval: 10 ms)
Option		/NC	The plate with clamp terminals is not attached.

Model	Suffix Code	Option Code	Description
MX125			Digital output module for MX
Output type	-MKC		"A" contact (SPST)
Output interval, number of channels	-M10		10 channels, highest output interval: 100 ms

Model	Suffix Code	Description
MX150		Base plate for MX
Base type	-1	For connection with one main module and one input/output module
	-2	For connection with one main module and two input/output modules
	-3	For connection with one main module and three input/output modules
	-4	For connection with one main module and four input/output modules
	-5	For connection with one main module and five input/output modules
	-6	For connection with one main module and six input/output modules

## Accessories

Model	Description
772061	Ten-Channel Screw Terminal Block

Note: The 772061 model is applicable only to MX110-UNV-M10 (Ten-Channel Medium-Speed Universal Input Module) or MX115-D05-H10 (Ten-Channel High-Speed DI Module).

Model	Suffix Code	Description
772062		Cable for connection between the input module and the screw terminal block
Cable length	-050	50 cm cable
	-100	100 cm cable

Note: The 772062 model is applicable only between MX110-UNV-M10 (Ten-Channel Medium-Speed Universal Input Module) and the Screw Terminal Block (772061) or between MX115-D05-H10 (Ten-Channel High-Speed DI Module) and the Screw Terminal Block (772061).

Model	Description
772063	Plate with clamp terminals

Note: The 772063 model is applicable only to MX110-UNV-M10 (Ten-Channel Medium-Speed Universal Input Module) or MX115-D05-H10 (Ten-Channel High-Speed DI Module).

Model	Description
772064	Clamp terminals

Note: The 772064 model is applicable only to MX110-UNV-H04 (Four-Channel High-Speed Universal Input Module).

Model	Description
772065	Clamp terminals

Note: The 772065 model is applicable only to MX125-MKC-M10 (Ten-Channel DO Module).

Model	Description
772066	Connector cover for base plate

Name	Model (Part No.)	Specifications
Shunt Resistance (for clamp terminals)	438920	250 Ω ± 0.1%
	438921	100 Ω ± 0.1%
	438922	10 Ω ± 0.1%
Shunt Resistance (for screw terminals)	415920	250 Ω ± 0.1%
	415921	100 Ω ± 0.1%
	415922	10 Ω ± 0.1%
CompactFlash Memory Card (CF card only)	B9968NM	32 MB
CompactFlash Memory Card (CF card only)	B9968NP	64 MB
CompactFlash Memory Card (CF card only)	B9968NQ	128 MB
CompactFlash Memory Card (CF card only)	B9968NR	256 MB
CompactFlash Memory Card (CF card only)	B9968NS	512 MB
Adapter for CompactFlash Memory Card	B9968NN	


## Application Software

Model	Remarks
MX180	MX100 Standard Software (For connection with one MX unit)

Model	Remarks
WX103	MXLOGGER (For connection with multiple MX units. Up to 20 units)
WX101	DAQLOGGER (For mixed connection of MX/DARWIN/MV/DX/μR)

Model	Remarks
MX190	API for MX100/DARWIN (Suite of functions for creating programs)

## Exterior Dimensions

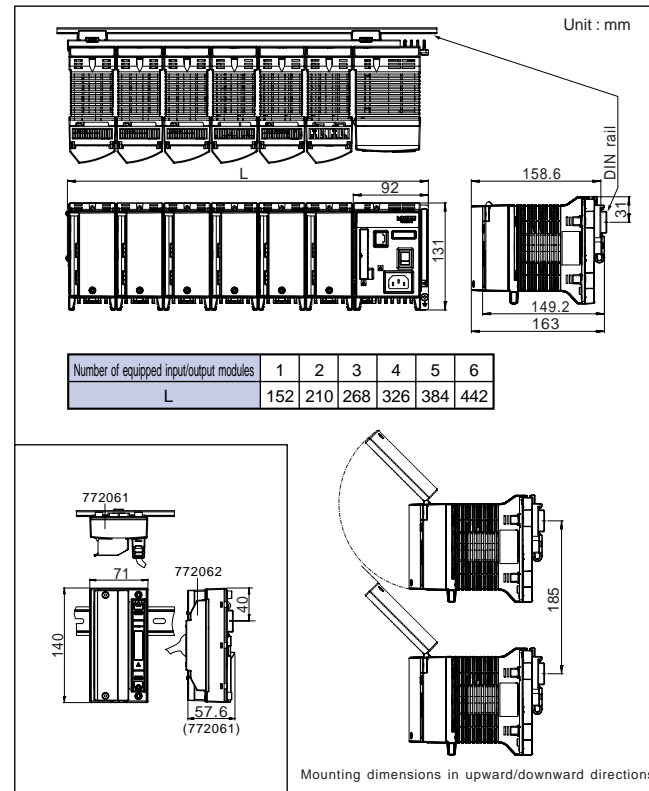

TCP/IP software of this product and documents on TCP/IP software were developed/created by Yokogawa Electric Corporation on the basis of BSD Networking Software (Release 1) licensed from University of California. Microsoft, MS, Windows, and Excel are registered trademarks of Microsoft Corporation in the United States. Lotus and 1-2-3 are registered trademarks of Lotus Development Corporation. MMX and Pentium are registered trademarks of Intel Corporation in the United States. Ethernet is a registered trademark of XEROX Corporation. LabVIEW is a trademark of National Instruments Corporation. All other company and product names mentioned here are trademarks or registered trademarks of their respective companies.

### NOTICE

- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- If this product is for use with a system requiring safeguards that directly involve personnel safety, please contact the Yokogawa sales offices.
- This product is not constructed to be explosion-proof.

# YOKOGAWA

YOKOGAWA ELECTRIC CORPORATION

Network Solutions Sales Business Div./Phone: (81)-55-243-0309, Fax: (81)-55-243-0397

E-mail: tm@csv.yokogawa.co.jp

YOKOGAWA CORPORATION OF AMERICA

YOKOGAWA EUROPE B.V.

YOKOGAWA ENGINEERING ASIA PTE. LTD.

Phone: (1)-770-253-7000, Fax: (1)-770-251-2088

Phone: (31)-33-4641806, Fax: (31)-33-4641807

Phone: (65)-62419933, Fax: (65)-62412606

Subject to change without notice.

[Ed : 03/b] Copyright ©2003

Printed in Japan, 402(YG)

RS-12E