



KONICA MINOLTA

NEW


Display Color Analyzer CA-310

Support for LED backlights

The next-generation model that surpasses the CA-210

*For high-speed, high-accuracy measurements
of LED-backlit LCD TVs*


LED television

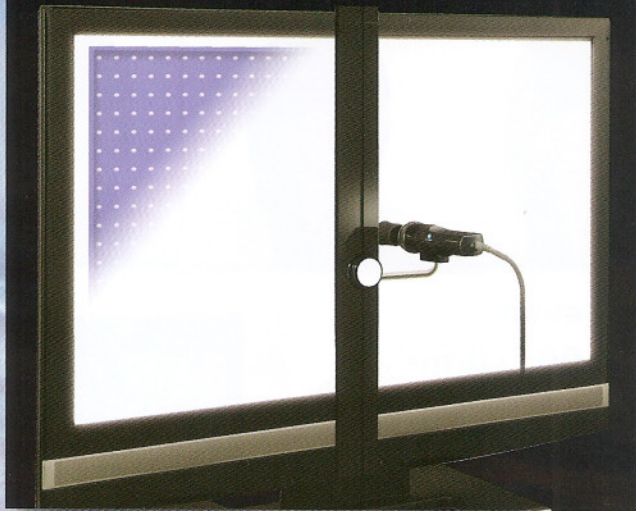

Smartphone



Uniformity

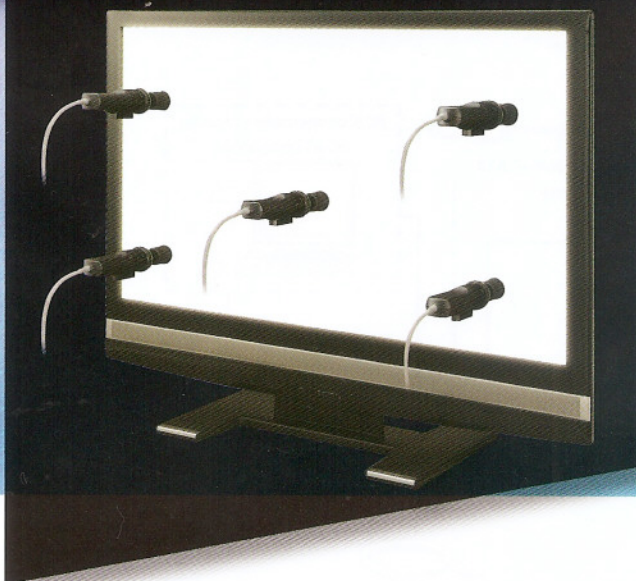

3D television




The essentials of imaging

Enables high-accuracy adjustment of LED-backlit LCD

White balance adjustment has advanced even further!


Our previous Display Color Analyzer CA-210 could adjust the white balance of LED-backlit LCD TVs to $\Delta xy=0.010$, but the new Display Color Analyzer CA-310 enables adjustment to $\Delta xy=0.003$ so colors are even more true, as can be seen below.

White balance adjustment of LED -backlit LCD TVs


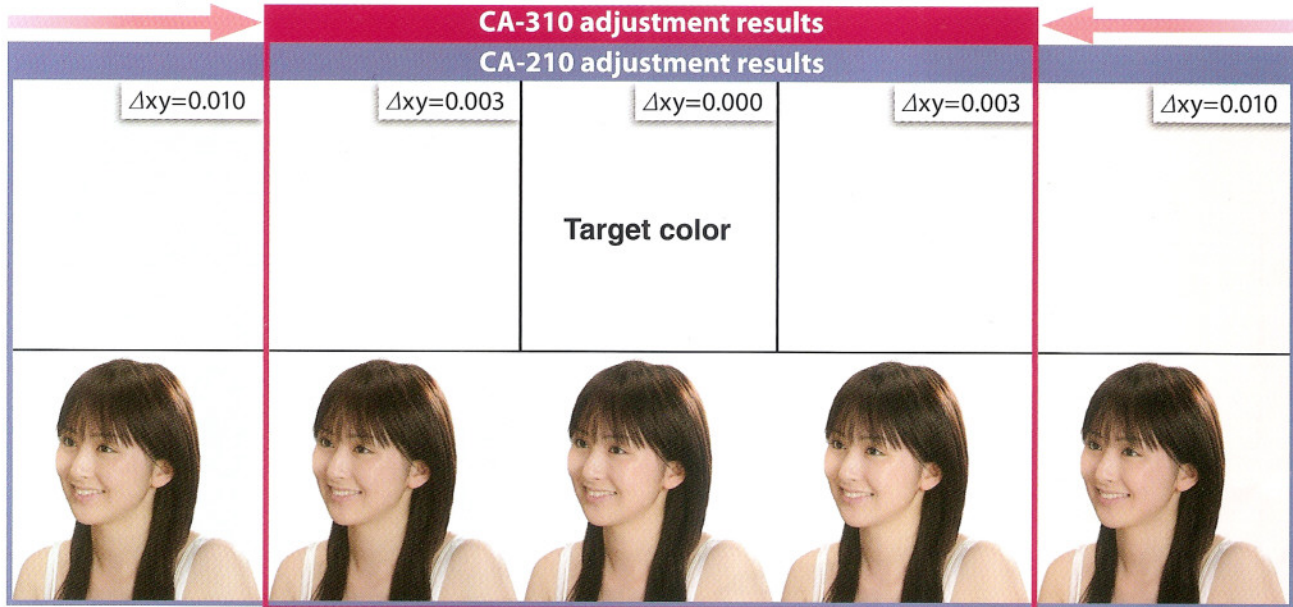


Enables high-speed measurement of even extremely low luminances down to 0.005 cd/m²

Sensor noise reduction technology has been used to enable measurements even in the extremely low luminance region around 0.005 cd/m² at speeds as fast as 4 times per second. This allows the high-speed high-accuracy measurement essential for manufacturing high-grade displays. In addition, at luminances higher than 2.0 cd/m², 20 measurements per second are possible.

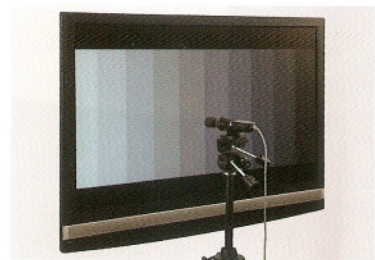

System Diagram

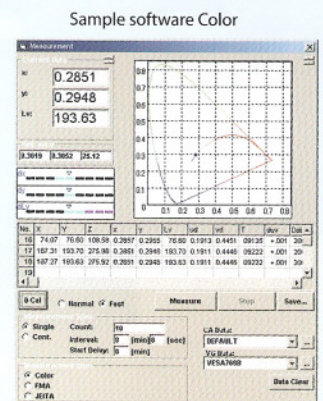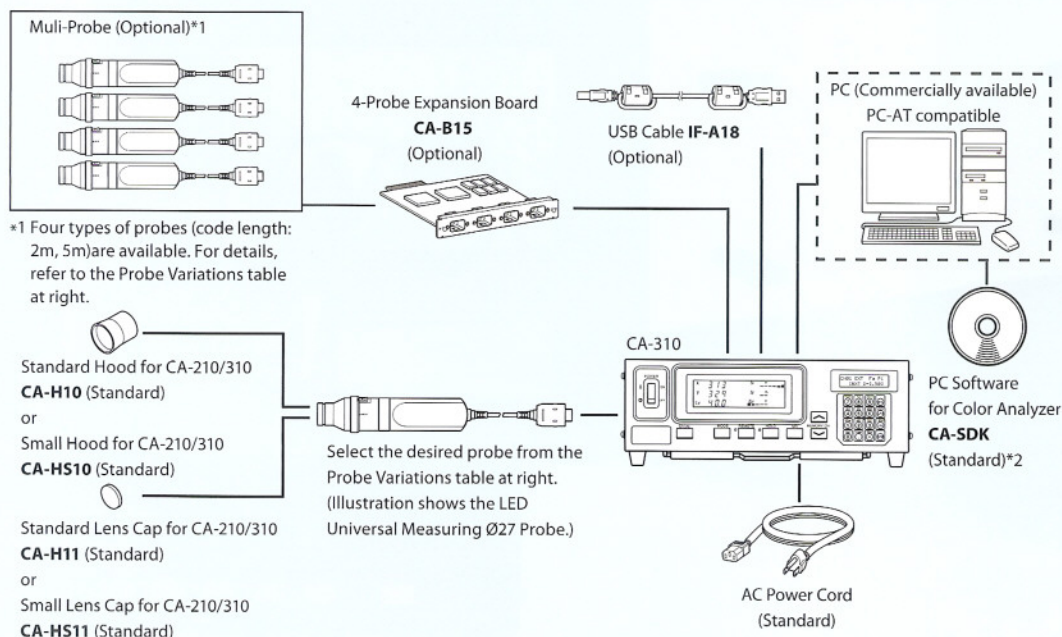


TVs white balance and greatly improves work efficiency.


Reduces errors due to LED emission distribution variations to less than 1/3.

Variations in the emission distribution of LED backlights result in individual differences of about 10nm in peak intensity wavelength. If LED-backlit LCD TVs with such individual differences are adjusted using conventional color analyzers, color differences of close to 0.010 on the xy chromaticity diagram may occur. But the CA-310 has sensor sensitivities that more closely match the CIE 1931 color-matching functions, enabling the color difference in the same case to be reduced to around 0.003, suppressing errors to less than 1/3.

Variations in the emission distribution of LED backlights

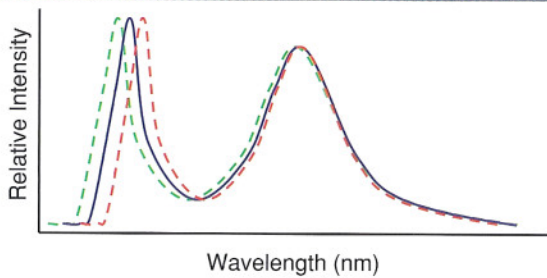

Measurement errors for LED backlights

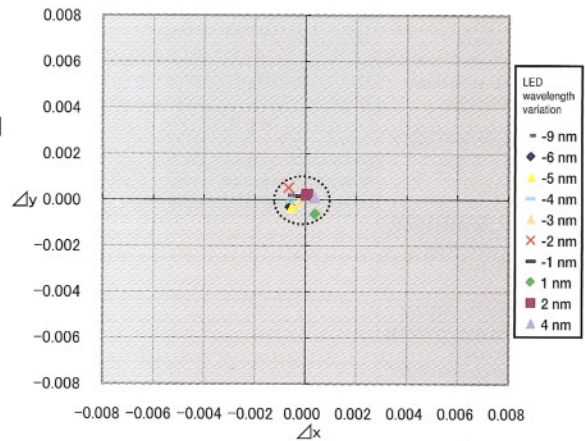

*Errors (differences from true values) for white LEDs with different peak wavelengths when measured using CA-310. User calibration to standard LED performed.

Number of digits for luminance display increased, enabling display to 0.0001 cd/m².



Expandable up to 5 measuring probes. (Requires expansion board CA-B15)

Probe variations

This table is based on the most popular method for controlling emission intensity for each display type.

*Measurements of displays using certain control methods are not possible. For details of measurement compatibility, contact your nearest Minolta representative.

Examples for which measurement is not possible:

- Displays which use PWM, etc. for control of emission intensity.
- Displays with backlights which emit intermittently.
- Displays which write black for each frame, etc.

○ Recommended

△ Measurement possible with restrictions, but probes marked with ○ are recommended

× Measurement not possible

		CA-310 Probe			
		LED Universal Measuring Probe		LED Flicker Measuring Probe	
		Ø27 Probe CA-PU32 (2m) CA-PU35 (5m)	Ø10 Probe CA-PSU32 (2m) CA-PSU35 (5m)	Ø27 Probe CA-P32 (2m) CA-P35 (5m)	Ø10 Probe CA-PS32 (2m) CA-PS35 (5m)
Transmissive / semi-transmissive LCD	Active Matrix Driven	○	○	○*	○*
	Passive Matrix Driven	○	○	×	×
Rear Screen Project	LCD	Active Matrix Driven	△	○*	△*
		Passive Matrix Driven	○	△	×
	DLP	○	△	×	×
	CRT	○	△	×	×
OLED	Active Matrix Driven	○	○	○*	○*
	Passive Matrix Driven	○	○	×	×
PDP		○	△	×	×
FED		○	○	×	×




(LED Flicker Measuring Probes are unsuitable for measurements of CRTs.)

Specifications

Item	CA-310(LED Universal Measuring Ø27 Probe)	CA-310(LED Universal Measuring Ø10 Probe)	CA-310 (LED Flicker Measuring Ø27 Probe)	CA-310 (LED Flicker Measuring Ø10 Probe)	
Receptor	Detector: Silicon photo cell				
Measurement area	Ø27 mm	Ø10 mm	Ø27 mm	Ø10 mm	
Acceptance angle	±2.5°	±5°	±2.5°	±5°	
Measurement distance	30±10 mm	30±5 mm	30±10 mm	30±5 mm	
Display range	Luminance	0.0001 to 1000 cd/m ²	0.0001 to 3000 cd/m ²	0.0001 to 1000 cd/m ²	
	Chromaticity	Displayed in 4 or 3-digit value (Can be chosen)			
Luminance	Measurement range	0.0050 to 1000 cd/m ²	0.0150 to 3000 cd/m ²	0.0050 to 1000 cd/m ²	
	Accuracy (for white)*1	0.0050 to 0.9999 cd/m ² ±4%±0.0015 cd/m ² 0.1000 to 9.9999 cd/m ² ±3%±0.0010 cd/m ² 10.00 to 1000 cd/m ² ±2%±0.0010 cd/m ²	0.0150 to 0.2999 cd/m ² ±4%±0.0045 cd/m ² 0.3000 to 29.99 cd/m ² ±3%±0.0030 cd/m ² 30.00 to 3000 cd/m ² ±2%±0.0030 cd/m ²	0.0050 to 0.9999 cd/m ² ±4%±0.0015 cd/m ² 0.1000 to 9.9999 cd/m ² ±3%±0.0010 cd/m ² 10.00 to 1000 cd/m ² ±2%±0.0010 cd/m ²	0.0150 to 0.2999 cd/m ² ±4%±0.0045 cd/m ² 0.3000 to 29.99 cd/m ² ±3%±0.0030 cd/m ² 30.00 to 3000 cd/m ² ±2%±0.0030 cd/m ²
	Repeatability(2σ)*1	0.0050 to 0.9999 cd/m ² 1% + 0.0010 cd/m ² 0.1000 to 9.9999 cd/m ² 0.2% + 0.0010 cd/m ² 1.000 to 1000 cd/m ² 0.1% + 0.0010 cd/m ²	0.0150 to 0.2999 cd/m ² 1% + 0.0030 cd/m ² 0.3000 to 2.999 cd/m ² 0.2% + 0.0030 cd/m ² 3.000 to 3000 cd/m ² 0.1% + 0.0030 cd/m ²	0.0050 to 0.9999 cd/m ² 1% + 0.0010 cd/m ² 0.1000 to 9.9999 cd/m ² 0.2% + 0.0010 cd/m ² 1.000 to 1000 cd/m ² 0.1% + 0.0010 cd/m ²	0.0150 to 0.2999 cd/m ² 1% + 0.0030 cd/m ² 0.3000 to 2.999 cd/m ² 0.2% + 0.0030 cd/m ² 3.000 to 3000 cd/m ² 0.1% + 0.0030 cd/m ²
Chromaticity	Measurement range	0.0500 to 1000 cd/m ²	0.1500 to 3000 cd/m ²	0.0500 to 1000 cd/m ²	
	Accuracy *1 (temperature:23±2°, relative humidity: (40±10)%)	0.0500 to 4.999 cd/m ² ±0.005 for white 5.000 to 19.99 cd/m ² ±0.004 for white 20.00 to 1000 cd/m ² ±0.003 for white 120 cd/m ² ±0.002 for white (±0.004 for monochrome)*2	0.1500 to 14.99 cd/m ² ±0.005 for white 15.00 to 59.99 cd/m ² ±0.004 for white 60.00 to 3000 cd/m ² ±0.003 for white 120 cd/m ² ±0.002 for white (±0.004 for monochrome)*2	0.0500 to 4.999 cd/m ² ±0.005 for white 5.000 to 19.99 cd/m ² ±0.004 for white 20.00 to 1000 cd/m ² ±0.003 for white 120 cd/m ² ±0.002 for white (±0.004 for monochrome)*2	0.1500 to 14.99 cd/m ² ±0.005 for white 15.00 to 59.99 cd/m ² ±0.004 for white 60.00 to 3000 cd/m ² ±0.003 for white 120 cd/m ² ±0.002 for white (±0.004 for monochrome)*2
	Repeatability(2σ)*1	0.0500 to 0.9999 cd/m ² 0.010 0.1000 to 1.9999 cd/m ² 0.004 0.2000 to 4.9999 cd/m ² 0.002 0.5000 to 1000 cd/m ² 0.001	0.1500 to 0.2999 cd/m ² 0.010 0.3000 to 5.9999 cd/m ² 0.004 0.6000 to 1.499 cd/m ² 0.002 1.500 to 3000 cd/m ² 0.001	0.0500 to 0.9999 cd/m ² 0.010 0.1000 to 1.9999 cd/m ² 0.004 0.2000 to 4.9999 cd/m ² 0.002 0.5000 to 1000 cd/m ² 0.001	0.1500 to 0.2999 cd/m ² 0.010 0.3000 to 5.9999 cd/m ² 0.004 0.6000 to 1.499 cd/m ² 0.002 1.500 to 3000 cd/m ² 0.001
Flicker Contrast method	Measurement range	-	-	5 cd/m ² or higher	
	Display range	-	-	0.0 ~ 999.9 %	
	Accuracy	-	-	±1 % (Flicker frequency: 30 Hz AC/DC 10% sine wave) ±2 % (Flicker frequency: 60 Hz AC/DC 10% sine wave)	
Flicker JEITA method *3	Measurement range	-	-	5 cd/m ² or higher	
	Accuracy	-	-	±0.5 dB (Flicker frequency: 30 Hz AC/DC 10% sine wave)	
	Repeatability(2σ)	-	-	0.3 dB (Flicker frequency: 30 Hz AC/DC 10% sine wave)	
Measurement speed *4	xyL _v	0.0050 to 0.9999 cd/m ² 4(3.5) times/sec. 0.1000 to 1.9999 cd/m ² 5(4.5) times/sec. 2.000 to 1000 cd/m ² 20(17) times/sec.	0.0150 to 0.2999 cd/m ² 4(3.5) times/sec. 0.3000 to 5.9999 cd/m ² 5(4.5) times/sec. 6.000 to 3000 cd/m ² 20(17) times/sec.	0.0050 to 0.9999 cd/m ² 4(3.5) times/sec. 0.1000 to 1.9999 cd/m ² 5(4.5) times/sec. 2.000 to 1000 cd/m ² 20(17) times/sec.	0.0150 to 0.2999 cd/m ² 4(3.5) times/sec. 0.3000 to 5.9999 cd/m ² 5(4.5) times/sec. 6.000 to 3000 cd/m ² 20(17) times/sec.
	Flicker Contrast	-	-	16(16) times/sec.	
	Flicker JEITA *3	-	-	0.5 (0.3) times/sec. *5	
Display	Digital	xyL _v , TΔuvL _v , RGB analyze, XYZ, u'v'L _v	xyL _v , TΔuvL _v , RGB analyze, XYZ, u'v'L _v , Flicker (Contrast method) *3	xyL _v , TΔuvL _v , RGB analyze, XYZ, u'v'L _v , Flicker (Contrast method) *3	
	Analog	ΔxΔyΔL _v , R/G B/G ΔG, ΔR B/R G/R	ΔxΔyΔL _v , R/G B/G ΔG, ΔR B/R G/R, Flicker (Contrast method) *3	ΔxΔyΔL _v , R/G B/G ΔG, ΔR B/R G/R, Flicker (Contrast method) *3	
	LCD	16 characters by 2 lines (with backlight)			
SYNC mode	NTSC, PAL, EXT, UNIV, INT				
Object under measurement	Vertical synchronization frequency: 40 to 200 Hz		Vertical synchronization frequency: 40 to 200 Hz (Luminance or chromaticity measurement), 40 to 130 Hz (Flicker measurement)		
Memory channel	100 channels				
Analyzer function	Standard function				
Interface	USB; RS-232C (38,400 bps or below)				
Multi-point Measurement	Max. 5 points (Use 4-Probe Expansion Board CA-B15)				
Operating temperature/humidity range	Temperature: 10 to 28°C; relative humidity 70% or less with no condensation Luminance change: ±2% of reading for white Chromaticity change ±0.002 for white, ±0.006 for monochrome from reading of Konica Minolta's standard LCD *1, 120 cd/m ² , with 23°C 40%				
Storage temperature/humidity range	0 to 28°C; relative humidity 70% or less with no condensation 28 to 40°C: relative humidity 40% or less with no condensation				
Input voltage range	100-240V~, 50-60 Hz, 50 VA				
Size/weight	Main body	340(W)×127(H)×216(D) mm/3.58 kg		Ø49×236 mm / 550 g	
	Probe	Ø49×208 mm / 530 g	Ø49×236 mm / 550 g	Ø49×236 mm / 550 g	

*1 The chromaticity and luminance are measured under Konica Minolta's condition (standard LCD(6500K, 9300K) is used). *2 The luminance for monochrome is measured when the reading of luminance for white is 120 cd/m². *3 Measurement of flicker (JEITA method) is supported by SDK software. *4 Measuring probe connected to probe connector P1 only, used USB(used RS-232C Baud rate: 38400 bps) *5 Measured by Konica Minolta's PC (P3-600 MHz)

Dimensions (Units : mm)

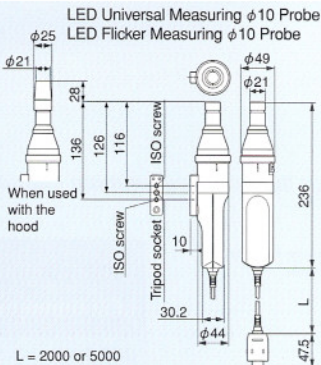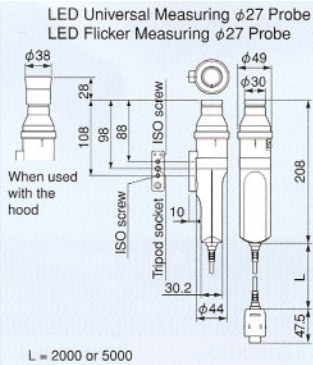

- Select the desired type of LED Universal Measuring type probe or LED Flicker Measuring type probe.
- Contains mercury in the backlighting of LCD used for display, dispose according to local, state or federal laws.
- KONICA MINOLTA and the Konica Minolta logo and the symbol mark, and "The essentials of imaging" are registered trademarks or trademarks of KONICA MINOLTA HOLDINGS, INC.
- Screens shown are for illustration purpose only.
- The specifications and drawings given here are subject to change without prior notice.



SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.



Certificate No : YKA 0937154
Registration Date : March 3, 1995



Certificate No : JQA-E-80027
Registration Date : March 12, 1997

KONICA MINOLTA SENSING, INC.
Konica Minolta Sensing Americas, Inc
Konica Minolta Sensing Europe B.V.

Osaka, Japan
New Jersey, U.S.A.
European Headquarter / BENELUX
German Office
French Office
UK Office
Italian Office
Swiss Office
Nordic Office
Polish Office

Konica Minolta (CHINA) Investment Ltd.

SE Sales Division
Beijing Branch
Guangzhou Branch
Chongqing Office
Qingdao Office
Wuhan Office

Konica Minolta Sensing Singapore Pte Ltd.

KONICA MINOLTA SENSING, INC.

Addresses and telephone/fax numbers are subject to change without notice. For the latest contact information, please refer to the KONICA MINOLTA SENSING Worldwide Offices web page :

Phone : 888-473-2656(in USA), 201-236-4300(outside USA)

Nieuwegein, Netherlands **Phone : +31(0)30 248-1193**
München, Germany **Phone : +49(0)89 4357 156 0**
Roissy CDG, France **Phone : +33(0)1 493-82519**
Milton Keynes, United Kingdom **Phone : +44(0)1908 540-622**
Milan, Italy **Phone : +39 02 39011.1**
Dietikon, Switzerland **Phone : +41(0)43 322-9800**
Västra Frölunda, Sweden **Phone : +46(0)31 7099464**
Wrocław, Poland **Phone : +48(0)71 33050-01**
Shanghai, China **Phone : +86-(0)21-5489 0202**
Beijing, China **Phone : +86-(0)10-8522 1551**
Guangdong, China **Phone : +86-(0)20-3826 4220**
Chongqing, China **Phone : +86-(0)23-6773 4988**
Shandong, China **Phone : +86-(0)532-8079 1871**
Hubei, China **Phone : +86-(0)27-8544 9942**
Singapore **Phone : +65 6563-5533**
Seoul, Korea **Phone : +82(0)2-523-9726**

Fax : 201-785-2482

Fax : +31(0)30 248-1280
Fax : +49(0)89 4357 156 99
Fax : +33(0)1 493-84771
Fax : +44(0)1908 540-629
Fax : +39 02 39011.223
Fax : +41(0)43 322-9809
Fax : +46(0)31 474945
Fax : +48(0)71 734 52 10
Fax : +86-(0)21-5489 0005
Fax : +86-(0)10-8522 1241
Fax : +86-(0)20-3826 4223
Fax : +86-(0)23-6773 4799
Fax : +86-(0)532-8079 1873
Fax : +86-(0)27-8544 9991
Fax : +65 6560-9721
Fax : +82(0)2-523-9729

<http://konicaminolta.com/instruments/about/network>